


## Traceco 15



### Characteristics

Self-Regulating heating cable, bus bar 2x0.55 mm<sup>2</sup>  
 Application: Frost protection against ice and low temperature maintenance  
 Use: Pipes, tanks, valves etc  
 Minimum bending radius 27 mm  
 12W/m at 10°C  
 230 V

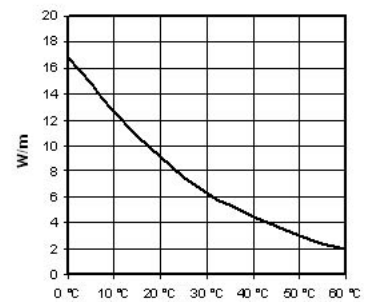

### Applications

They are designed to prevent any risk of burst pipes due to freezing.  
 Cable structure: 2x0.55 mm<sup>2</sup> bus wire + self limiting element + insulation + tin-plated copper protective earth wires with protective aluminium foil + thermoplastic outer jacket.

### Technical Features

Heating wire	Cu Nickel plated
Dimensions cable	12 W//m - 7.30x5.10 mm
Max. length circuit	12 W/m, 110 m
Min. installation T <sup>a</sup>	-35 °C
Maximum exposure T <sup>a</sup>	65°C (energised) 80°C (deenergised)
Certificates	CE, ATEX, VDE, GOST-R, CSTB, FIMKO
Tolerance	-0/+5 W

### Circuit Length

W/m	Starting T <sup>a</sup>	Maximum Length (m)		
		16 A	20 A	32 A
12 W/m	-20	100	-	-
	0	100	-	-
	10	100	-	-